



Quick Installation Guide

Included Accessories



Placement sticker




Quick guide




Mounting hardware

Product Structure

Dimensions



Cable Functions



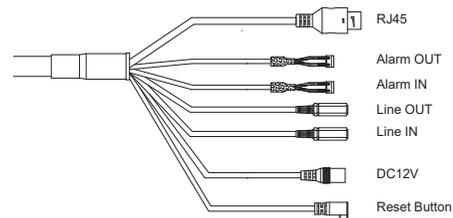


Network Operation

1. Install and double click the IP Finder shortcut on the desktop. When the IP Finder is launched, you can search cameras by clicking on the "search" button on the top panel. The camera will be displayed on the IP Finder.
2. Double click the camera on the IP Finder, you will be prompted with a pop-up window asking for login information, type in "admin" (default login name) and "1234" (default password). Then you can access the camera web user interface and are able to update multiple settings.


Hardware Installation

1. Position the placement sticker at the desired installation location and use a driller to drill the holes on the sticker, then hammer the supplied three screw anchors into the holes.
2. Drill a cable entry hole in the mounting surface. This step may be omitted if the cable is placed along the mounting surface. Align three supplied screws with the wall anchors, and screw the camera into place. Connect the network cable to the RJ-45 connector on the camera.
3. Use the supplied L-key to loosen the adjustment screws on the mounting bracket arm. Adjust the camera angle by rotating the camera body and mounting bracket arm.
4. Fix the bracket base to the mounting surface by tightening the screws.
5. Tighten the adjustment screws on the mounting bracket arm to secure the position.

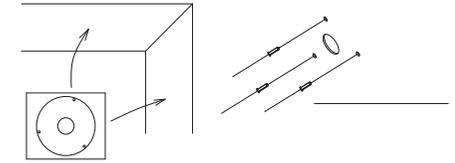

Insert and remove the Micro SD card

1. Loose the screw and open the cover.
2. Insert SD card into SD card slot, or take SD card out from SD card slot.
3. Install and tighten the cover.

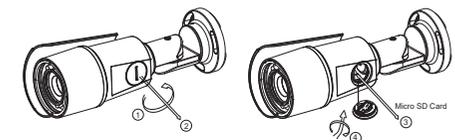

Notice: The quick guide is subject to change without notice.